

ELECTRICAL CHARACTERISTICS

	395	294	400	298	405	302	410	306	415	310
	30.85	28.8	31.05	29.0	31.24	29.2	31.43	29.3	31.64	29.6
	12.81	10.23	12.89	10.30	12.97	10.36	13.05	10.42	13.13	10.48
	36.75	34.6	37.00	34.8	37.25	35.1	37.50	35.3	37.75	35.5
	13.69	11.04	13.78	11.11	13.86	11.17	13.94	11.24	14.02	11.30
	20.20		20.50		20.70		21.00		21.30	

MECHANICAL CHARACTERISTICS

	Monocrystalline Silicon (10Busbar)
	108pcs in series (6*18)
	1722*1134*30mm (67.80*44.65*1.18inches)
	21.5kg (47.4lbs.)
	3.2mm AR Coating Tempered Glass
	Anodized Aluminium Alloy
	IP68, 3 Bypass Diodes
	4mm ² (IEC), 12AWG(UL) 350mm(+),250mm(-) or Customized Length
	T01/LJQ-3-CSY/MC4/MC4-EV02

APPLICATION CONDITIONS

	1000V/1500V/DC
	-40°C~+85°C
	25A
	Class


TEMPERATURE CHARACTERISTICS

	-0.35%/°C
	-0.26%/°C
	+0.048%/°C
	43±2°C

PACKING CONFIGURATION

	36	36(USA)
	936	828

I-V CURVE

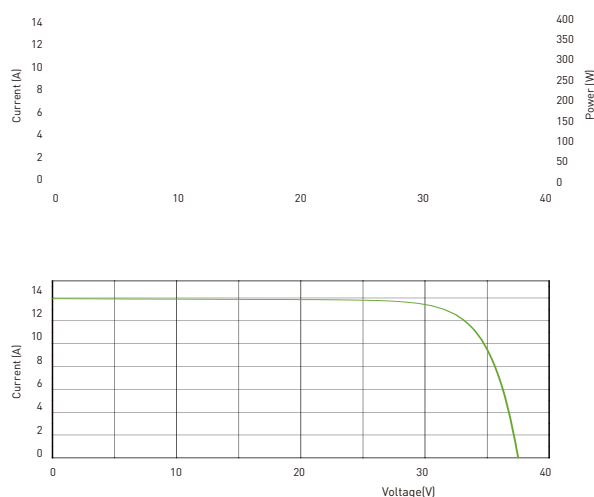

TECHNICAL DRAWINGS



The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Suzhou Talesun Solar Technologies Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.