



TALESUN



12

25



保证功率

B R

TP6L72M
TP6L72M(H) **144-cell**

435 - 455W



PID
Anti

PID
85% / 85% RH




IP68



	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	435	324	440	328	445	332	450	335	455	339
	40.3	37.6	40.5	37.8	40.7	38.0	40.9	38.2	41.1	38.4
	10.80	8.62	10.87	8.67	10.94	8.73	11.01	8.78	11.08	8.84
	49.0	45.6	49.2	45.8	49.4	46.0	49.6	46.2	49.8	46.4
	11.33	9.15	11.40	9.20	11.47	9.26	11.54	9.32	11.61	9.37
	20.00		20.20		20.40		20.70		20.90	

	9BB
	144 (6*24)
	2094*1038*35mm (82.44*40.87*1.38)
	23.5kg (51.81lbs)
	3.2mm
	IP68, 3
	4mm ² (IEC), 12AWG(UL) 300mm
	T01/LJQ-3-CSY/MC4/MC4-EVO2

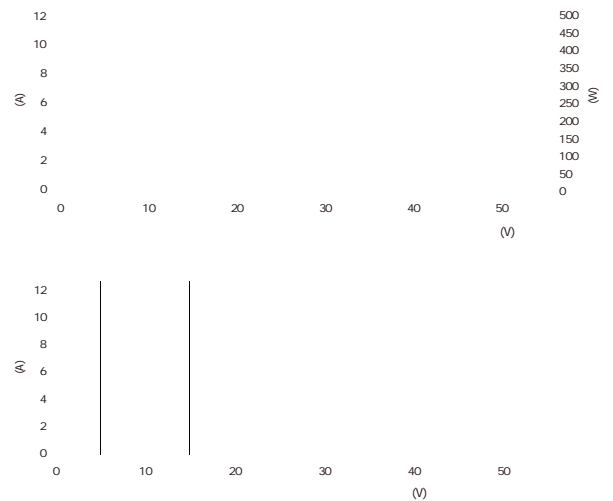

	1000V/1500V/DC
	-40°C~+85°C
	20A
	Class

	31	31(USA)
	715	682

