




BISTAR

TP6L72M
TP6L72M(H) **144-cell**

435 - 455W

9BB PERC

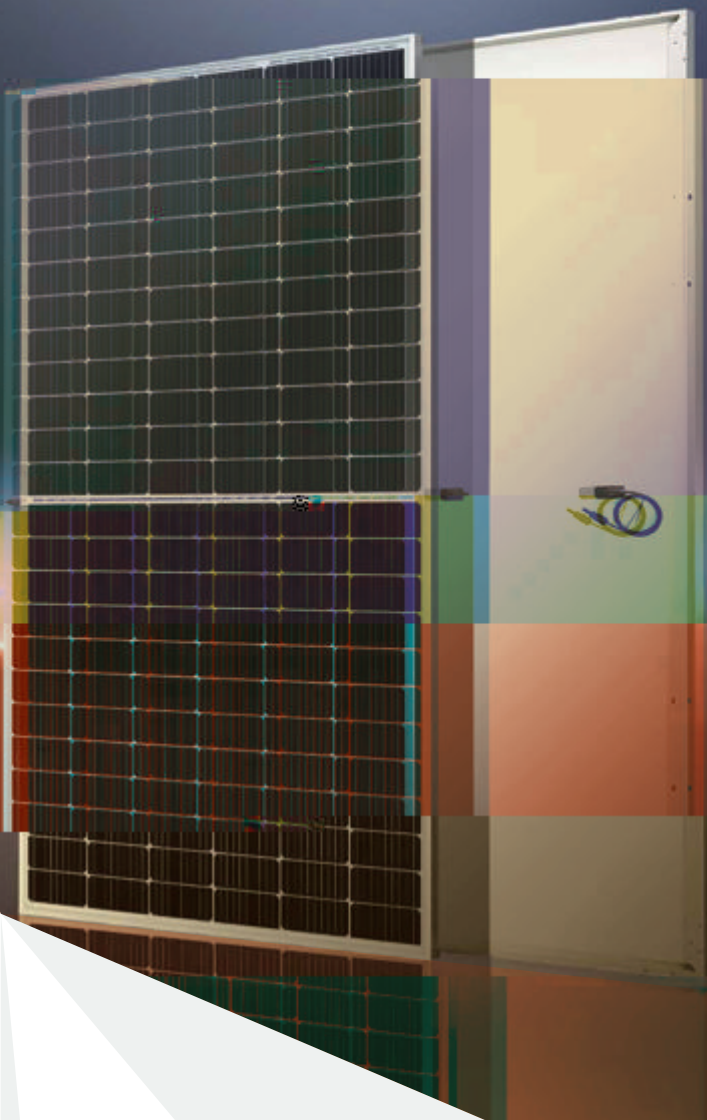

体系及产品认证


- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



质量保证

12

25

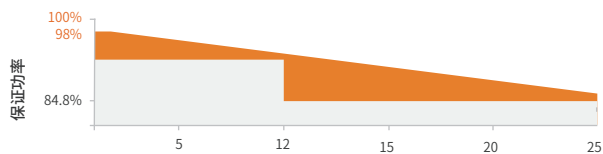

产品特性



9BB半片电池技术

2%

0.55%



显著降低热斑风险



优秀的抗PID性能

PID
85 / 85% RH 192



www.alesun.com



marketing.hq@alesun.com

* GL-CN-Version 2023.09.25

	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	435	324	440	328	445	332	450	335	455	339
	40.3	37.6	40.5	37.8	40.7	38.0	40.9	38.2	41.1	38.4
	10.80	8.62	10.87	8.67	10.94	8.73	11.01	8.78	11.08	8.84
	49.0	45.6	49.2	45.8	49.4	46.0	49.6	46.2	49.8	46.4
	11.33	9.15	11.40	9.20	11.47	9.26	11.54	9.32	11.61	9.37
	20.00		20.20		20.40		20.70		20.90	

	9BB
	144 (6*24)
	2094*1038*35mm (82.44*40.87*1.38)
	23.5kg (51.81lbs)
	3.2mm
	IP68, 3
	4mm ² (IEC), 12AWG(UL) 300mm
	T01/LJQ-3-CSY/MC4/MC4-EVO2

	1000V/1500V/DC
	-40°C~+85°C
	20A
	Class

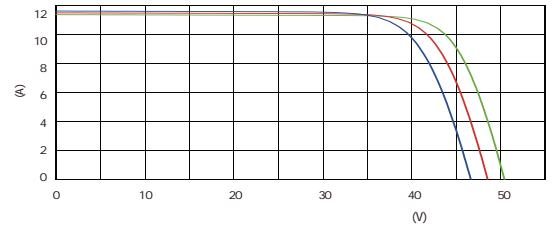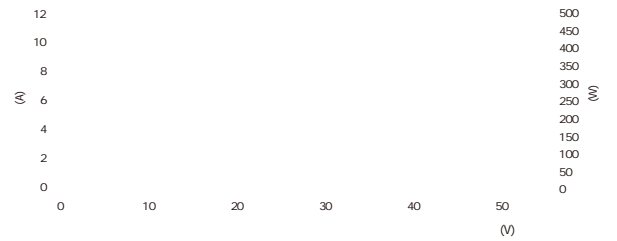

102

	31	31(USA)
	715	682

