




# BIPRO

TM7G72M **144-cell**

570- 590W

16BB N

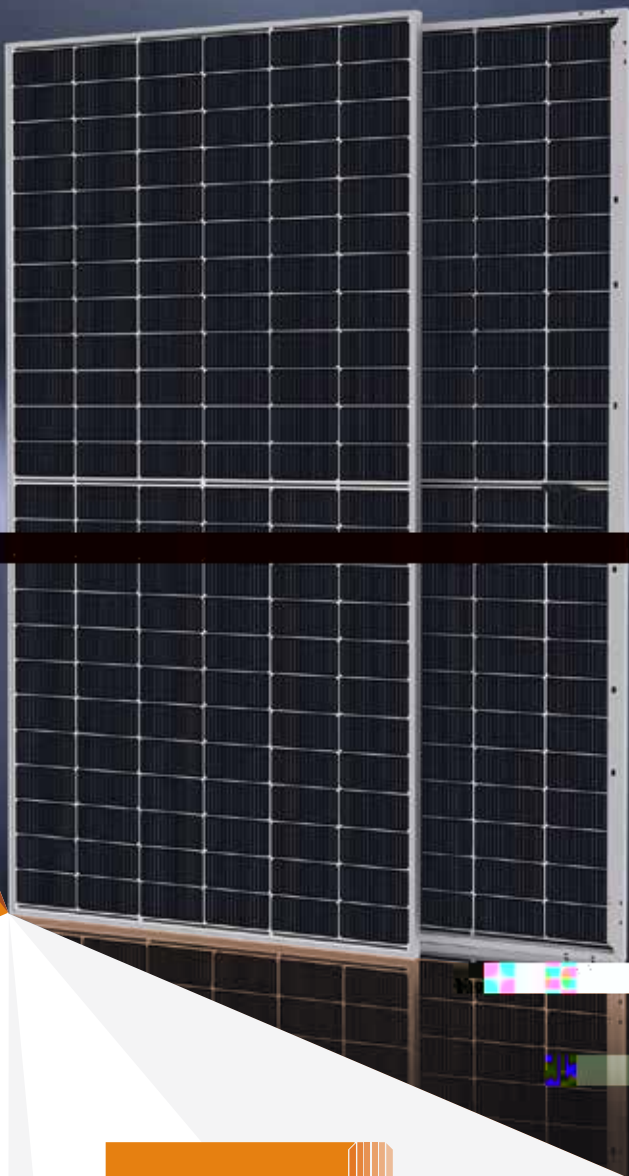


- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



12

30

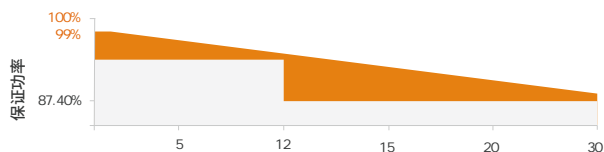

16BB

LID/LeTID  
1% 0.4%



TOPCon

LCOE



PID


192 PID



	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	22.10		22.30		22.50		22.60		22.80	

	5%	10%	15%	20%	25%
	609	638	667	696	725
	42.66	42.66	42.66	42.66	42.66
	14.28	14.96	15.64	16.32	16.99
	51.47	51.47	51.47	51.47	51.47
	14.96	15.68	16.39	17.10	17.81

	N	16BB
	144	(6*24)
	2278*1134*30mm (89.69*44.65*1.18 )	
	31.8kg (70.11lbs.)	
	2.0mm	
	2.0mm	
	IP68, 3	
	4mm <sup>2</sup> (IEC), 12AWG (UL) 350mm(+), 250mm(-)	
	T01/LJQ-3-CSY/MC4/MC4-EVO2	

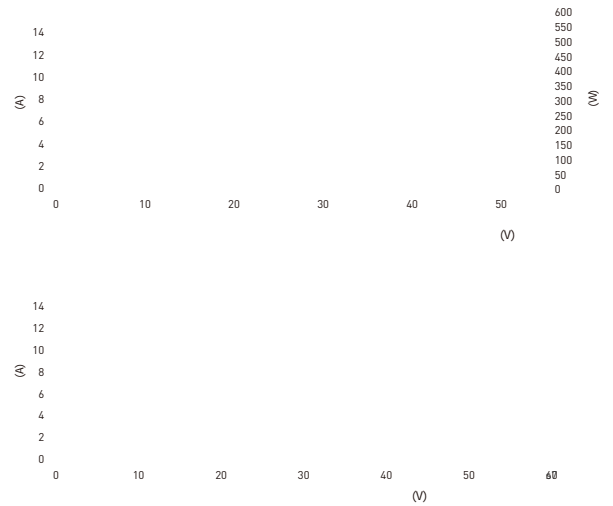

	1500V/DC
	-40°C~+85°C
	30A
	Class
	5400Pa 2400Pa
	80%± 5%

	36	36(USA)
	720	576

