

### 16BB Half-cut Cell Technology

Lower LID/LeTID degradation and better low light performance  
Attenuation  $< 1\%$  (1st year) /  $\leq 0.4\%$  (Linear)



### Industry Leading High Yield

Bifacial TOPCon cell technology,  
Dual-sided power generation gain from back side depending on  
albedo, significantly reduce LCOE



	600	451	605	455	610	459	615	463	620	466
	43.20	40.66	43.37	40.82	43.54	40.98	43.71	41.14	43.88	41.30
	13.88	11.10	13.95	11.15	14.01	11.19	14.06	11.24	14.12	11.29
	51.40	48.82	51.60	49.01	51.80	49.20	52.00	49.39	52.20	49.58
	14.65	11.82	14.71	11.88	14.79	11.94	14.86	11.99	14.92	12.05
	22.20		22.40		22.60		22.80		23.00	




	5%	10%	15%	20%	25%
	635	666	696	726	756
	43.36	43.36	43.36	43.36	43.36
	14.65	15.35	16.04	16.74	17.44
	51.60	51.60	51.60	51.60	51.60
	15.45	16.18	16.92	17.65	18.39

	N-type Mono-Crystallin (16Busbar)
	144pcs in series (6*24)
	2382*1134*30mm (93.78*44.65*1.18inches)
	33.8kg (74.52lbs.)
	2.0mm AR Coating Semi-tempered Glass
	2.0mm Glazed Semi-tempered Glass
	Anodized Aluminium Alloy
	IP68, 3 Bypass Diodes
	4mm <sup>2</sup> (IEC), 12AWG(UL) 350mm(+), 250mm(-) or Customized Length
	T01/LJQ-3-CSY/MC4/MC4-EV02

	1500V/DC
	-40°C~+85°C
	30A
	Class II
	Front side 5400Pa, Back side 2400Pa
	80%±5%

	-0.29%/°C
	-0.24%/°C
	+0.043%/°C
	43±2°C

	36	36(USA)
	720	540

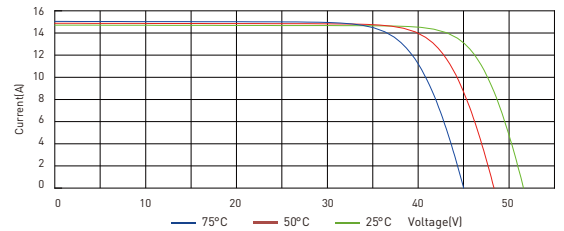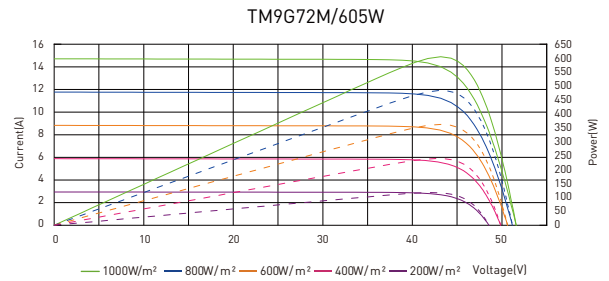

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Suzhou Talesun Solar Technologies Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.